


PVC Layflat hoses

Structure: Flexible hose made out of soft-grade PVC wall, reinforced with polyester yarn.





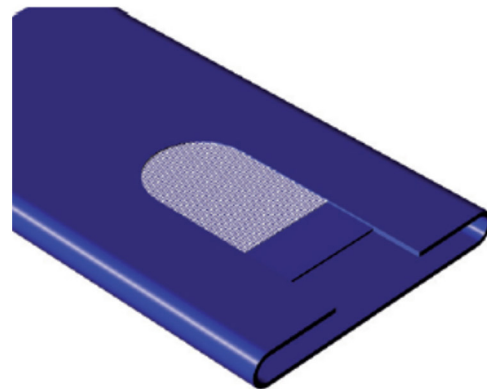

Application: Designed for medium duty discharge of liquids compatible with PVC, in agriculture, civil engineering, tank trucks, and water delivery at medium working pressure in irrigation systems.

Working temperature: -20/60°C



XDFLAT M

Medium duty lay-flat discharge hose - reinforced with polyester yarn

 int mm	 int inch	 kg/ m	 bar	 bar	 m
25	1"	0.16	6	18	10-100
38	1.5"	0.24	6	18	10-100
40		0.26	6	18	10-100
52	2"	0.33	5	15	10-100
63	2.5"	0.41	5	15	10-100
77	3"	0.50	5	15	10-100
90	3.5"	0.59	4	12	10-100
103	4"	0.76	4	12	10-100
110		0.79	3	9	10-100
153	6"	1.12	3	9	10-50
204	8"	1.70	3	9	10-50

